

SIEMENS

Product data sheet

3UF5021-3AN00-1

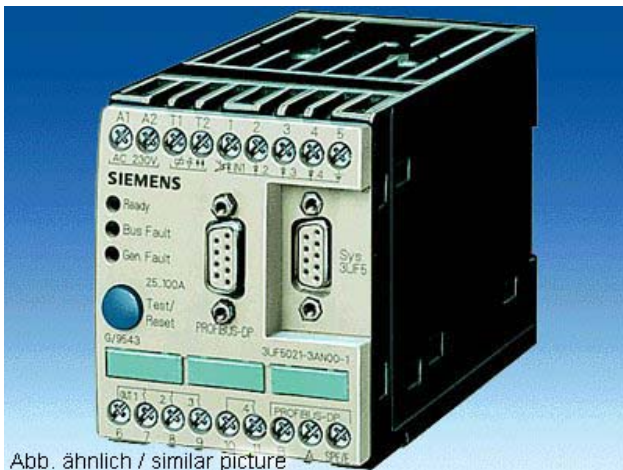


Abb. ähnlich / similar picture

SIMOCODE-DP BASIC UNIT PROFIBUS-DP
INTERFACE 1.5 MBAUD,
RS485 4I/4O FREELY PARAMETERIZABLE US: AC
230V,
50/60HZ 25 - 100A, WIDTH 70MM,
INPUT THERMISTOR MOTOR PROTECTION
OUTPUTS MONOSTABLE

General technical details:

Adjustable response current

- of the current-dependent overload release / initial value 25 A
- of the current-dependent overload release / final value 100 A

Switching behaviour

monostable

Number of outputs

4

Number of inputs

4

Number of NO contacts / for auxiliary contact

4

Product component / Entrance for thermistor connection

Yes

Type of fixing/fixation

screw and snap-on mounting

Equipment identification

- acc. to DIN EN 61346-2 F
- acc. to DIN 40719 extended acc. to IEC 204-2 /
acc. to IEC 750 F

Control circuit:

Type of voltage

AC

Control supply voltage

<ul style="list-style-type: none"> • at 50 Hz / for AC / rated value <ul style="list-style-type: none"> • minimum 230 V • maximum 230 V • at 60 Hz / for AC / rated value <ul style="list-style-type: none"> • minimum 230 V • maximum 230 V 	
Supply voltage frequency / for auxiliary and control current circuit / rated value <ul style="list-style-type: none"> • minimum 50 Hz • maximum 60 Hz 	
Main circuit:	
Operating frequency / rated value <ul style="list-style-type: none"> • minimum 50 Hz • maximum 60 Hz 	
Operating voltage / rated value <ul style="list-style-type: none"> • minimum 110 V • maximum 690 V 	
Number of poles / for main circuit	3
Connection type:	
Design of the electrical connection <ul style="list-style-type: none"> • for main current circuit straight-through transformers • for auxiliary and control current circuit screw-type terminals 	
Ambient conditions:	
Protection class IP	IP20
Ambient temperature / during the operating phase <ul style="list-style-type: none"> • minimum -25 °C • maximum 60 °C 	
Dimensions:	
Width	70 mm
Height	85 mm
Depth	132.5 mm
last change:	10/31/2006

Technical Assistance:	Telephone:	+49 (0) 911-895-5900 (8°° - 17°° CET)
	Fax:	+49 (0) 911-895-5907
	E-Mail:	technical-assistance@siemens.com
	Internet:	www.siemens.de/lowvoltage/technical-assistance