## Data sheet

DS1-X for ET 200S Standard DOL starter expandable Setting range 0.14...0.2 A, AC-3, up to 0.06 kW / 400 V Electromechanical starter for brake control module



Figure similar

Product brand name	SIMATIC
Product designation	Motor starters
Design of the product	direct starter
Product type designation	ET 200S

General technical data	
Product function	
<ul> <li>on-site operation</li> </ul>	Yes
Power loss [W] typical	9 W
Insulation voltage	
• rated value	500 V
Degree of pollution	3 at 400 V, 2 at 500 V according to IEC60664 (IEC61131)
Surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
<ul> <li>between main and auxiliary circuit</li> </ul>	400 V
Protection class IP	IP20
Shock resistance	5g / 11 ms
Operating frequency maximum	750 1/h

Mechanical service life (switching cycles)	
<ul> <li>of the main contacts typical</li> </ul>	100 000
Type of assignment	2
Reference code acc. to DIN 40719 extended	A
according to IEC 204-2 acc. to IEC 750	
Reference code acc. to DIN EN 81346-2	Q
Reference code acc. to DIN EN 61346-2	Q
Product function	
• direct start	Yes
• reverse starting	No
Product component Motor brake output	Yes
Product feature	
<ul> <li>brake control with 230 V AC</li> </ul>	No
<ul> <li>brake control with 24 V DC</li> </ul>	No
• brake control with 180 V DC	No
• brake control with 500 V DC	No
Product extension braking module for brake control	Yes
Product function Short circuit protection	Yes
Design of short-circuit protection	circuit-breakers
Trip class	CLASS 10
Maximum short-circuit current breaking capacity (Icu)	
• at 400 V rated value	50 kA

Electromagnetic compatibility	
EMC emitted interference	
• acc. to IEC 60947-1	CISPR11, ambience A (industrial sector)
EMI immunity acc. to IEC 60947-1	corresponds to degree of severity 3, ambience A (industrial sector)
Conducted interference	
• due to burst acc. to IEC 61000-4-4	2 kV on voltage supply, inputs and outputs
<ul> <li>due to conductor-earth surge acc. to IEC</li> <li>61000-4-5</li> </ul>	2 kV (U > 24 V DC)
<ul> <li>due to conductor-conductor surge acc. to IEC 61000-4-5</li> </ul>	1 kV (U > 24 V DC)
Field-bound parasitic coupling acc. to IEC 61000-4-3	80 MHz 1 GHz 10 V/m, 1.4 GHz2 Hz 3 V/m, 2 GHz 2.7 GHz 1 V/m

Safety related data	
B10 value	
<ul> <li>with high demand rate acc. to SN 31920</li> </ul>	1 000 000
Proportion of dangerous failures	
<ul> <li>with low demand rate acc. to SN 31920</li> </ul>	50 %
<ul> <li>with high demand rate acc. to SN 31920</li> </ul>	75 %
Failure rate [FIT]	

<ul> <li>with low demand rate acc. to SN 31920</li> </ul>	100 FIT
T1 value for proof test interval or service life acc. to IEC 61508	20 y
Protection against electrical shock	finger-safe
Main circuit	
Number of poles for main current circuit	3
Design of the switching contact	electromechanical
Adjustable pick-up value current of the current-	0.14 0.2 A
dependent overload release	
Type of the motor protection	bimetal
Operating voltage	
• rated value	200 400 V
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
Relative positive tolerance of the operating frequency	10 %
Relative negative tolerance of the operating	10 %
frequency	
Operating range relative to the operating voltage at AC	
● at 50 Hz	200 440 V
Operating power	
• at AC-3	
— at 400 V rated value	0.06 kW
Inputs/ Outputs	0.06 kW
	0.06 kW
Inputs/ Outputs	0.06 kW No
Inputs/ Outputs Product function	
Inputs/ Outputs  Product function  • digital inputs parameterizable  • digital outputs parameterizable  Number of digital inputs	No
Inputs/ Outputs  Product function  • digital inputs parameterizable  • digital outputs parameterizable	No No
Inputs/ Outputs  Product function  • digital inputs parameterizable  • digital outputs parameterizable  Number of digital inputs	No No
Inputs/ Outputs  Product function  • digital inputs parameterizable  • digital outputs parameterizable  Number of digital inputs  Number of sockets	No No O
Inputs/ Outputs  Product function  • digital inputs parameterizable  • digital outputs parameterizable  Number of digital inputs  Number of sockets  • for digital output signals	No No O
Inputs/ Outputs  Product function  • digital inputs parameterizable  • digital outputs parameterizable  Number of digital inputs  Number of sockets  • for digital output signals  • for digital input signals	No No O
Inputs/ Outputs  Product function  • digital inputs parameterizable  • digital outputs parameterizable  Number of digital inputs  Number of sockets  • for digital output signals  • for digital input signals  Supply voltage	No No O O O O O O O O O O O O O O O O O
Inputs/ Outputs  Product function  • digital inputs parameterizable  • digital outputs parameterizable  Number of digital inputs  Number of sockets  • for digital output signals  • for digital input signals  Supply voltage  Type of voltage of the supply voltage	No No O O O O O O O O O O O O O O O O O
Inputs/ Outputs  Product function  • digital inputs parameterizable  • digital outputs parameterizable  Number of digital inputs  Number of sockets  • for digital output signals  • for digital input signals  Supply voltage  Type of voltage of the supply voltage  Supply voltage 1 at DC	No No O O O O O O O O O O O O O O O O O
Inputs/ Outputs  Product function  • digital inputs parameterizable  • digital outputs parameterizable  Number of digital inputs  Number of sockets  • for digital output signals  • for digital input signals  Supply voltage  Type of voltage of the supply voltage  Supply voltage 1 at DC  Supply voltage 1 at DC rated value	No No 0 0 0 0 DC 24 24 V
Inputs/ Outputs  Product function  • digital inputs parameterizable  • digital outputs parameterizable  Number of digital inputs  Number of sockets  • for digital output signals  • for digital input signals  Supply voltage  Type of voltage of the supply voltage  Supply voltage 1 at DC  Supply voltage 1 at DC rated value  • minimum permissible  • maximum permissible  Control circuit/ Control	No No 0 0 0 0 DC 24 24 V
Inputs/ Outputs  Product function  • digital inputs parameterizable  • digital outputs parameterizable  Number of digital inputs  Number of sockets  • for digital output signals  • for digital input signals  Supply voltage  Type of voltage of the supply voltage  Supply voltage 1 at DC  Supply voltage 1 at DC rated value  • minimum permissible  • maximum permissible	No No 0 0 0 0 DC 24 24 V
Inputs/ Outputs  Product function  • digital inputs parameterizable  • digital outputs parameterizable  Number of digital inputs  Number of sockets  • for digital output signals  • for digital input signals  Supply voltage  Type of voltage of the supply voltage  Supply voltage 1 at DC  Supply voltage 1 at DC rated value  • minimum permissible  • maximum permissible  Control circuit/ Control	No No O  O  C  24 24 V  20.4 V  28.8 V
Inputs/ Outputs  Product function  • digital inputs parameterizable  • digital outputs parameterizable  Number of digital inputs  Number of sockets  • for digital output signals  • for digital input signals  Supply voltage  Type of voltage of the supply voltage  Supply voltage 1 at DC  Supply voltage 1 at DC rated value  • minimum permissible  • maximum permissible  Control circuit/ Control  Type of voltage of the control supply voltage	No No O  O  C  24 24 V  20.4 V  28.8 V

24 24 V
0.3744 W
0.374 W
4.1184 W
4.118 W

Installation/ mounting/ dimensions	
Mounting position	vertical, horizontal
Mounting type	pluggable on terminal module
Height	265 mm
Width	45 mm
Depth	120 mm

Ambient conditions	
Installation altitude at height above sea level	
• maximum	2 000 m
Ambient temperature	
<ul><li>during operation</li></ul>	0 60 °C
during storage	-40 +70 °C
during transport	-40 +70 °C
Relative humidity during operation	5 95 %

Communication/ Protocol	
Protocol is supported	
<ul> <li>PROFIBUS DP protocol</li> </ul>	Yes
<ul> <li>PROFINET protocol</li> </ul>	Yes
Design of the interface	
<ul> <li>PROFINET protocol</li> </ul>	Yes
Product function Bus communication	Yes
Protocol is supported	
<ul> <li>AS-interface protocol</li> </ul>	No
Product function	
<ul> <li>supports PROFlenergy measured values</li> </ul>	No
<ul><li>supports PROFlenergy shutdown</li></ul>	No
address range memory of address range	
• of the inputs	1 byte
• of the outputs	1 byte
Type of electrical connection	
<ul> <li>of the communication interface</li> </ul>	via backplane bus
• for communication transmission	via backplane bus

Connections/Terminals	
Type of electrical connection	
• for main current circuit	screw-type terminals
Type of electrical connection	
<ul><li>1 for digital input signals</li></ul>	using control module
<ul> <li>2 for digital input signals</li> </ul>	using control module
Type of electrical connection	
<ul> <li>at the manufacturer-specific device interface</li> </ul>	plug
<ul> <li>for main energy infeed</li> </ul>	screw-type terminals
<ul> <li>for load-side outgoing feeder</li> </ul>	Screw-type terminals
<ul> <li>for main energy transmission</li> </ul>	via energy bus
<ul> <li>for supply voltage line-side</li> </ul>	via backplane bus
<ul> <li>for supply voltage transmission</li> </ul>	via backplane bus

## UL/CSA ratings

#### Operating voltage

• at AC at 60 Hz acc. to CSA and UL rated value

600 V

### Certificates/approvals

**General Product Approval** 

**EMC** 

For use in hazardous locations













Declaration	of
Conformity	

**Test Certific-**

other

ates

Type Test Certificates/Test Report

Confirmation



# Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)


https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1301-0BB00-0AA2


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1301-0BB00-0AA2

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RK1301-0BB00-0AA2

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RK1301-0BB00-0AA2&lang=en

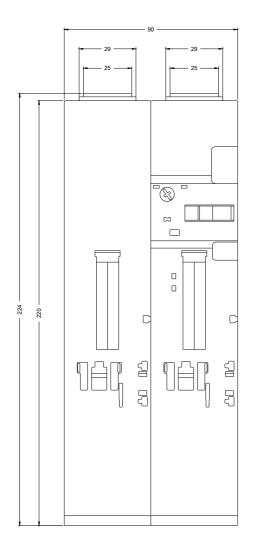

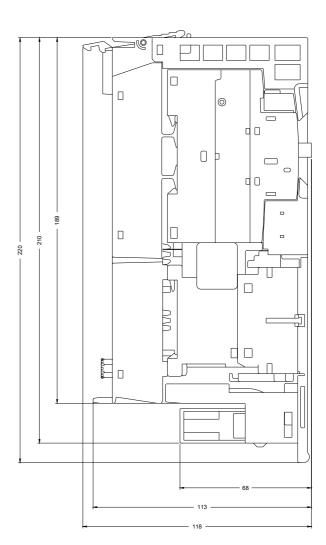

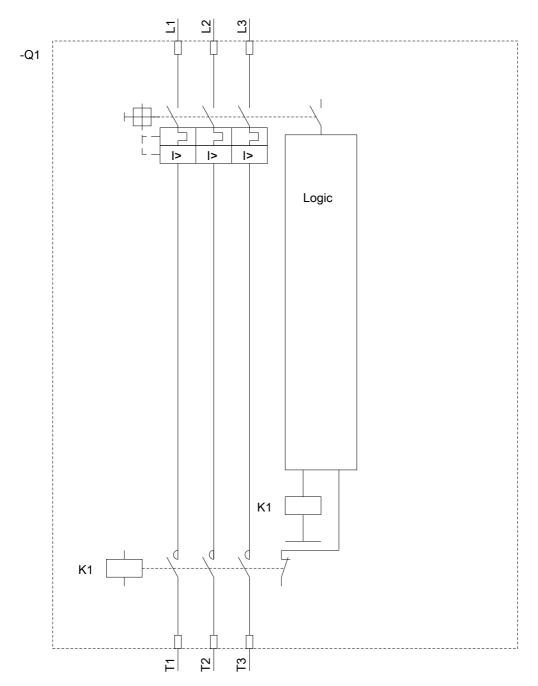

**last modified:** 02/13/2019