


AC1304



AS-Interface PLC

ControllerE 2Mstr 1RS232C

Article no longer available - archive entry

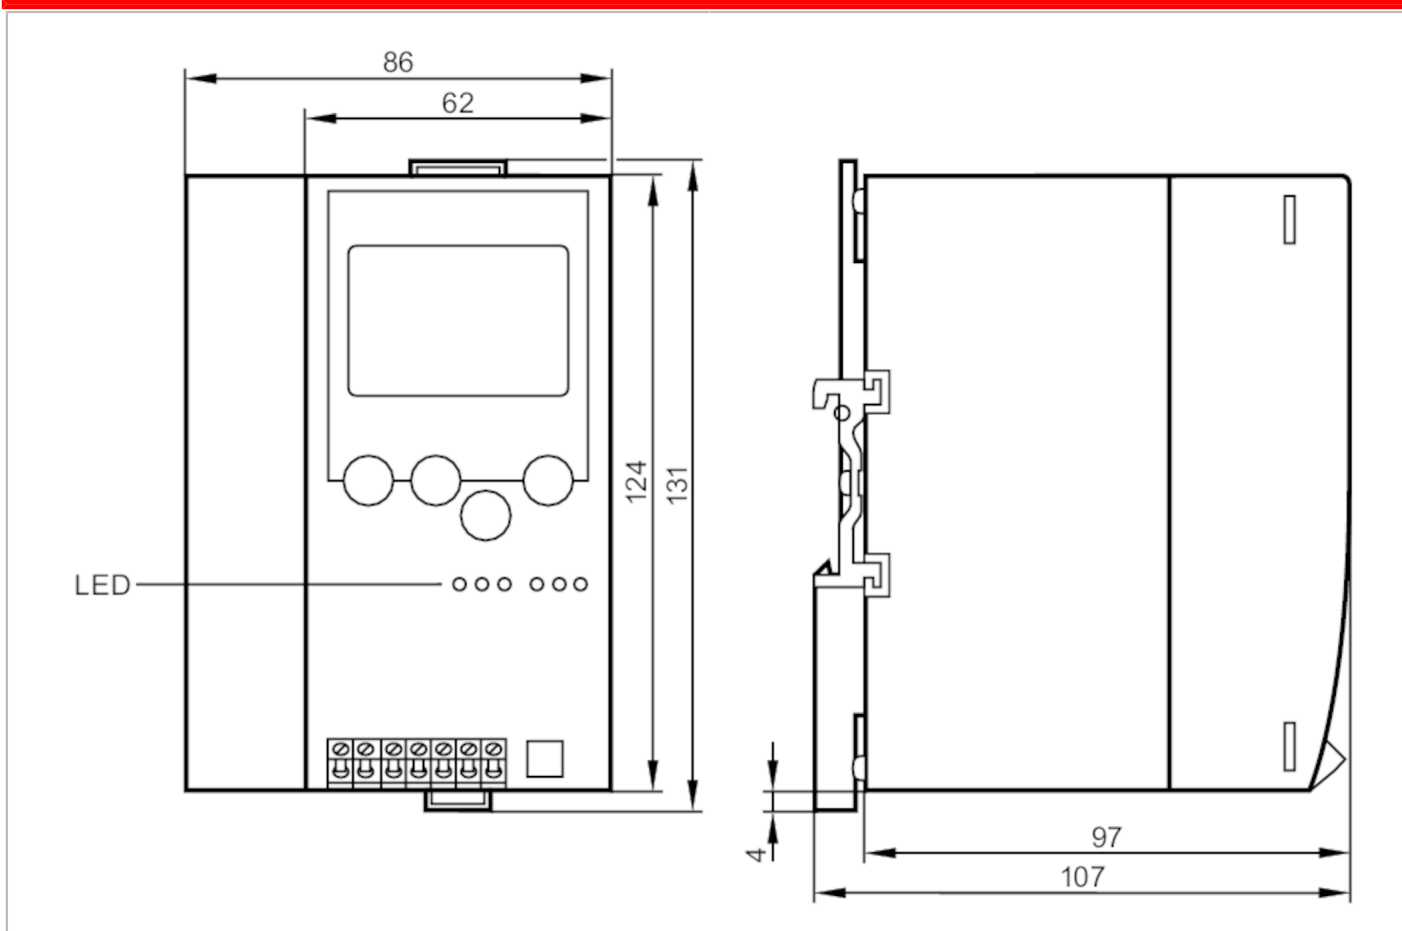

Application	
Application	decentralised controller
Electrical data	
Operating voltage [V]	24 DC; (operating voltage "supply class 2" according to cULus)
Insulation rating [V]	500
Current consumption [mA]	< 500
Max. current consumption from AS-i [mA]	10
Max. power consumption [VA]	10
Number of AS-i masters	2
Electrical separation	yes
Interfaces	
Communication interface	RS232

AC1304



AS-Interface PLC

ControllerE 2Mstr 1RS232C

RS232	
Number of R232 interfaces	1
Transmission rate	9600...115200 Baud
Connector type	RJ11
Usage type	programming
Addition	electrically isolated

Operating conditions	
Ambient temperature [°C]	0...60
Storage temperature [°C]	-20...70
Max. relative air humidity [%]	95
Protection	IP 20

AS-i classification	
AS-i version	2.1
AS-i profile	M3
AS-i certificate	61102


Mechanical data	
Weight [g]	517.4
Housing	housing for DIN rail mounting
Dimensions [mm]	86 x 131 x 107
Materials	aluminium; steel sheet galvanised

Displays / operating elements		
Display	function	2 x LED, red
		3 x LED, green
		3 x LED, yellow
		full graphic LCD display

Remarks	
Pack quantity	1 pcs.

Electrical connection

Connection

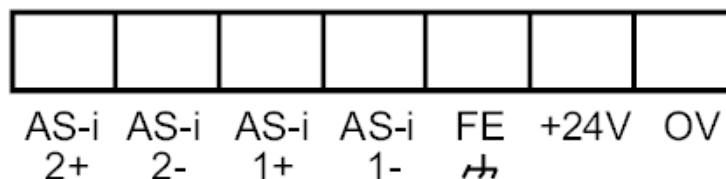

Article no longer available - archive entry

AC1304

AS-Interface PLC

ControllerE 2Mstr 1RS232C

