


# AC1307



## AS-Interface EtherNet/IP gateway with PLC

Control.E 1Mstr ET IP RS232

Article no longer available - archive entry

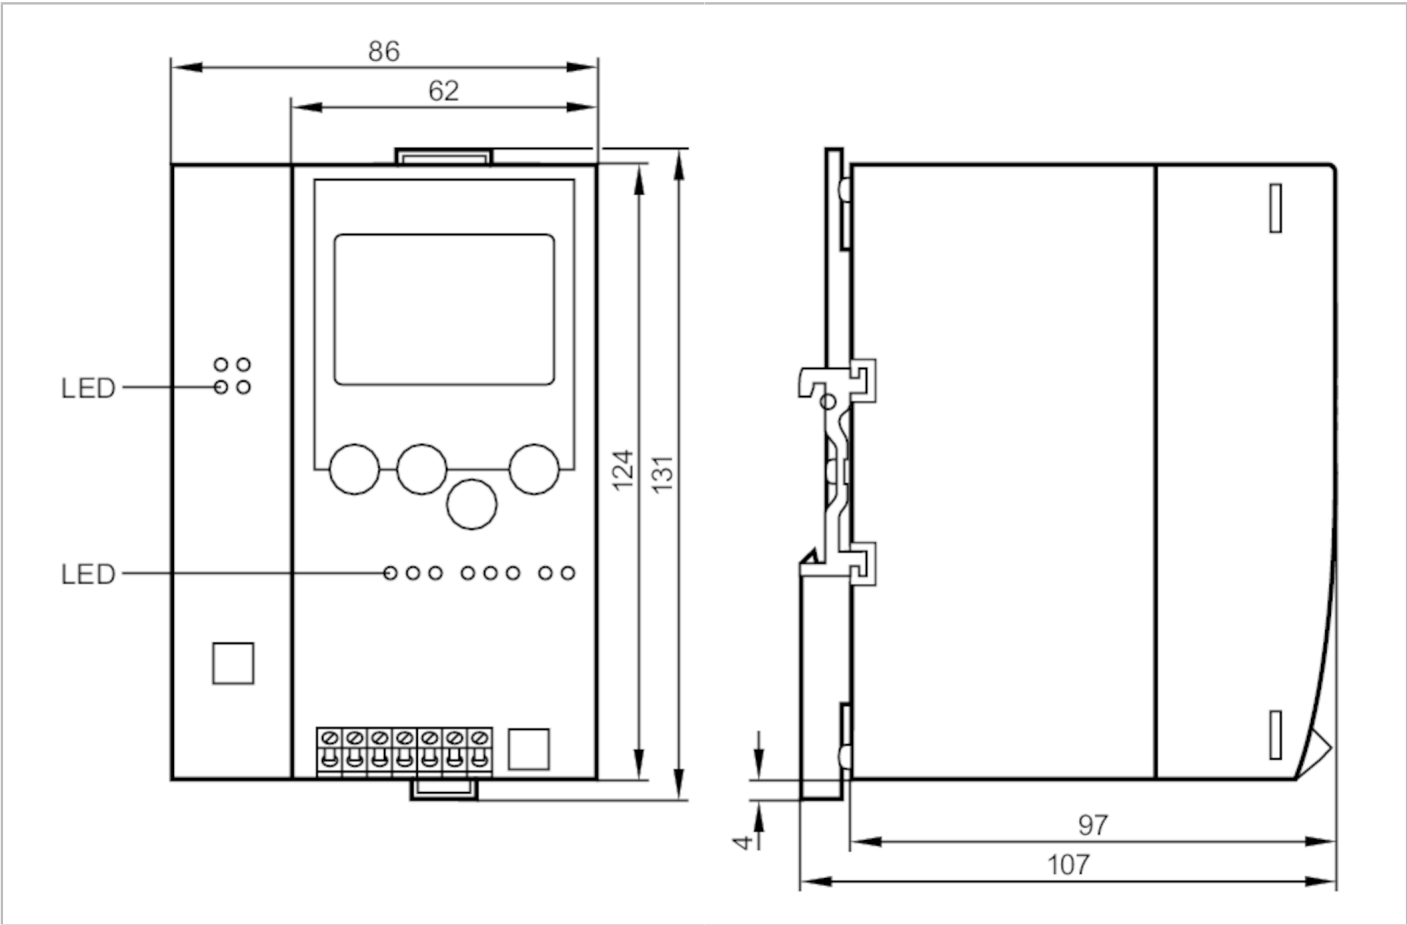

Application			
Application		Use as decentralized controller and Ethernet IP Gateway / Web-Server	
Electrical data			
Operating voltage	[V]	24 DC; (cULus - Class 2 source required)	
Current consumption	[mA]	< 400	
Max. current consumption from AS-i	[mA]	10	
Max. power consumption	[VA]	10	
Number of AS-i masters		1	
Interfaces			
Communication interface		RS232; Ethernet	
Ethernet			
Transmission rate		10; 100	
Protocol		EtherNet/IP; IP	
Usage type		Data transmission	
Note on interfaces			CIP protocol EtherNet/IP server group 2 and group 3



AS-Interface EtherNet/IP gateway with PLC

Control.E 1Mstr ET IP RS232

RS232			
Number of R232 interfaces		1	
Transmission rate		9600...115200 Baud	
Type of connector		RJ11	
Usage type		Programming	
Note on interfaces			electrically isolated
Operating conditions			
Ambient temperature		[°C]	0...60
Storage temperature		[°C]	-20...70
Max. relative air humidity		[%]	95
Protection		IP 20	
AS-i classification			
AS-i version		2.1	
AS-i profile		M1e	
AS-i certificate pending		yes	
Mechanical data			
Housing		housing for DIN rail mounting	
Material		aluminum; steel sheet galvanised	
Displays / operating elements			
Display	Function		3 x LED, red
			4 x LED, green
			2 x LED, yellow
			full graphic LCD display
Remarks			
Pack quantity		1 pcs.	
Electrical connection			
Connection			

