


E20575



Fiber optic diffuse reflection sensor

FT-30-N-V-M8

Discontinued article

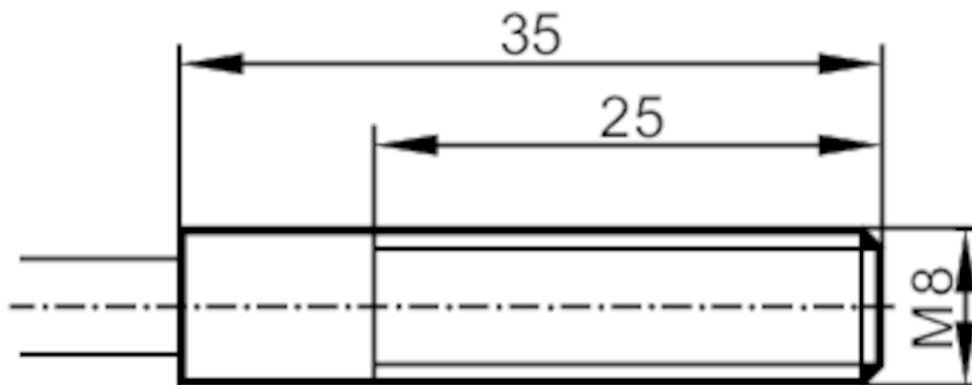

Application

Function principle Diffuse reflection sensor

Monitoring range

Range with fiber optic amplifier type OIF

OIF

Range fiber optics [mm] 70

Operating conditions

Ambient temperature [°C] -20...80

Mechanical data

Weight [g] 113.6

Version of sensing head straight

Sensing head thread M8

Total length [mm] 600

Min. bending radius [mm] 30

Fiber arrangement

Fiber material glass

Fiber head material stainless steel (1.4305 / 303)

Fiber sheath material Vitalon

E20575



Fiber optic diffuse reflection sensor

FT-30-N-V-M8

Accessories	
Items supplied	Hexagon nuts: 2 x M8
	tooth lock washers: 2
	Knurled nut: 1 x M30
Remarks	
Pack quantity	1 pcs.