


SM4000



Magnetic-inductive flow meter

SMR14DXXFRKG/US-100

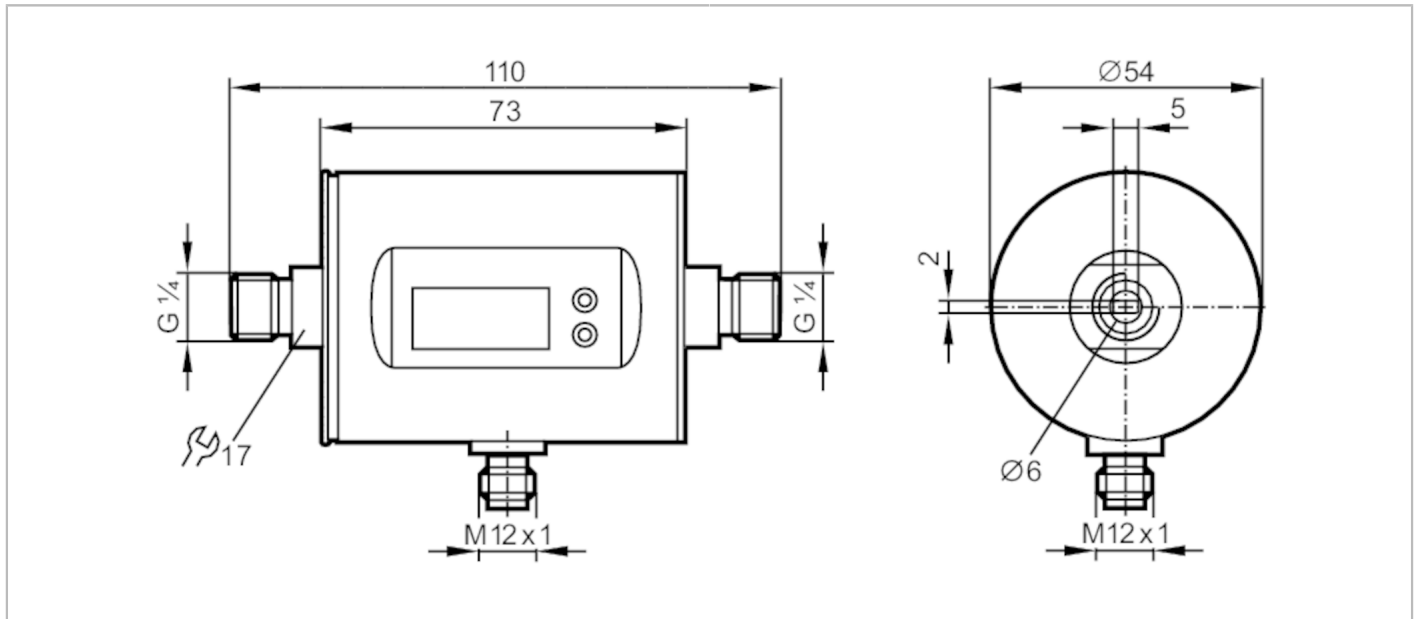

Product characteristics

| | | |
|------------------------------|---|-----------------|
| Number of inputs and outputs | Number of digital outputs: 2; Number of analog outputs: 1 | |
| Measuring range | 5...3000 ml/min | 0.005...3 l/min |
| Process connection | threaded connection G 1/4 DN6 flat seal | |

Application

| | | |
|--|---|--|
| System | gold-plated contacts | |
| Application | Totalizer function; for industrial applications | |
| Installation | connection to pipe by means of an adapter | |
| Media | Conductive liquids; water; water-based media | |
| Note on media | conductivity: $\geq 20 \mu\text{S/cm}$ viscosity: $< 70 \text{ mm}^2/\text{s}$ (40 °C) | |
| Medium temperature [°C] | 0...60 | |
| Pressure rating [bar] | 10 | |
| Pressure rating [Mpa] | 1.2 | |
| MAWP (for applications according to CRN) [bar] | 7.3 | |

Electrical data

| | | |
|-----------------------------|----------------------------|--|
| Operating voltage [V] | 18...30 DC; (to SELV/PELV) | |
| Current consumption [mA] | < 80 | |
| Protection class | III | |
| Reverse polarity protection | yes | |
| Power-on delay time [s] | 5 | |

Inputs / outputs

| | | |
|------------------------------|---|--|
| Number of inputs and outputs | Number of digital outputs: 2; Number of analog outputs: 1 | |
|------------------------------|---|--|

Inputs

| | | |
|--------|---------------|--|
| Inputs | counter reset | |
|--------|---------------|--|

SM4000



Magnetic-inductive flow meter

SMR14DXXFRKG/US-100

| Outputs | |
|--|--|
| Total number of outputs | 2 |
| Output signal | switching signal; analog signal; pulse signal; IO-Link; (configurable) |
| Electrical design | PNP/NPN |
| Number of digital outputs | 2 |
| Output function | normally open / closed; (configurable) |
| Max. voltage drop switching output DC [V] | 2 |
| Permanent current rating of switching output DC [mA] | 200 |
| Number of analog outputs | 1 |
| Analog current output [mA] | 4...20; (scalable) |
| Max. load [Ω] | 500 |
| Analog voltage output [V] | 0...10; (scalable) |
| Min. load resistance [Ω] | 2000 |
| Pulse output | flow rate meter |
| Short-circuit protection | yes |
| Type of short-circuit protection | yes (non-latching) |
| Overload protection | yes |
| Measuring/setting range | |
| Measuring range | 5...3000 ml/min 0.005...3 l/min |
| Display range [ml/min] | -1999...3600 |
| Resolution [ml/min] | 1 |
| Set point SP [ml/min] | 20...3000 |
| Reset point rP [ml/min] | 5...2984 |
| Analog start point ASP [ml/min] | 0...2400 |
| Analog end point AEP [ml/min] | 600...3000 |
| Low flow cut-off LFC [ml/min] | < 60 |
| Volumetric flow quantity monitoring | |
| Pulse value | 1...3000 ml |
| Pulse length [s] | 0,008...2 |
| Temperature monitoring | |
| Measuring range [$^{\circ}\text{C}$] | -20...80 |
| Resolution [$^{\circ}\text{C}$] | 0.2 |
| Set point SP [$^{\circ}\text{C}$] | -19.2...80 |
| Reset point rP [$^{\circ}\text{C}$] | -19.6...79.6 |
| Analog start point [$^{\circ}\text{C}$] | -20...60 |
| Analog end point [$^{\circ}\text{C}$] | 0...80 |
| In steps of [$^{\circ}\text{C}$] | 0.2 |
| Accuracy / deviations | |
| Flow monitoring | |
| Accuracy (in the measuring range) | $\pm (2 \% \text{ MW} + 0,5 \% \text{ MEW})$ |
| Repeatability | $\pm 0,2\% \text{ MEW}$ |

SM4000



Magnetic-inductive flow meter

SMR14DXXFRKG/US-100


| | | |
|--------------------------------|---|------------------------|
| Temperature monitoring | | |
| Accuracy | [K] | ± 2,5 (Q > 0,5 l/min) |
| Reaction times | | |
| Flow monitoring | | |
| Response time | [s] | 0.15; (dAP = 0, T19) |
| Delay time programmable dS, dr | [s] | 0...50 |
| Damping process value dAP | [s] | 0...5 |
| Temperature monitoring | | |
| Dynamic response T05 / T09 | [s] | T09 = 40 (Q > 1 l/min) |
| Software / programming | | |
| Parameter setting options | Flow monitoring; quantity meter; Preset counter; Temperature monitoring; hysteresis / window; normally open / closed; switching logic; current/voltage/pulse output; Start-up delay; display can be deactivated; Display unit | |
| Interfaces | | |
| Communication interface | IO-Link | |
| Transmission type | COM2 (38,4 kBaud) | |
| IO-Link revision | 1.1 | |
| SDCI standard | IEC 61131-9 | |
| Profiles | Smart Sensor: Process Data Variable; Device Identification, Device Diagnosis | |
| SIO mode | yes | |
| Required master port class | A | |
| Process data analog | 3 | |
| Process data binary | 2 | |
| Min. process cycle time | [ms] | 4 |
| Supported DeviceIDs | Type of operation | DeviceID |
| | default | 671 |
| Operating conditions | | |
| Ambient temperature | [°C] | -10...60 |
| Storage temperature | [°C] | -25...80 |
| Protection | IP 67 | |
| Tests / approvals | | |
| EMC | DIN EN 60947-5-9 | |
| | model number | 007MI |
| CPA approval | accuracy class | - |
| | maximum allowable error | ± 2,5 % FS |
| | Q (min) | 0,0003 m³/h |
| | Q (t) | - |
| | Q (max) | 0,18 m³/h |
| Shock resistance | DIN IEC 68-2-27 | 20 g (11 ms) |
| Vibration resistance | DIN IEC 68-2-6 | 5 g (10...2000 Hz) |
| MTTF | [years] | 144 |
| Pressure equipment directive | sound engineering practice; can be used for group 2 fluids; group 1 fluids on request | |

SM4000



Magnetic-inductive flow meter

SMR14DXXFRKG/US-100

| Mechanical data | | |
|---|---|--|
| Weight [g] | 536.5 | |
| Material | stainless steel (1.4404 / 316L); PBT-GF20; PC; FKM; TPE | |
| Materials (wetted parts) | stainless steel (1.4404 / 316L); PEEK; FKM | |
| Process connection | threaded connection G 1/4 DN6 flat seal | |
| Displays / operating elements | | |
| Display | Display unit | 6 x LED, green (ml/min, l/h, l, m ³ , °C, 10 ³) |
| | Switching status | 2 x LED, yellow |
| | Measured values | alphanumeric display, 4-digit |
| | Programming | alphanumeric display, 4-digit |
| Remarks | | |
| Remarks | MW = Measured value MEW = Final value of the measuring range | |
| Pack quantity | 1 pcs. | |
| Electrical connection | | |
| Connector: 1 x M12; coding: A; Contacts: gold-plated | | |
|  | | |


SM4000



Magnetic-inductive flow meter

SMR14DXXFRKG/US-100

Connection

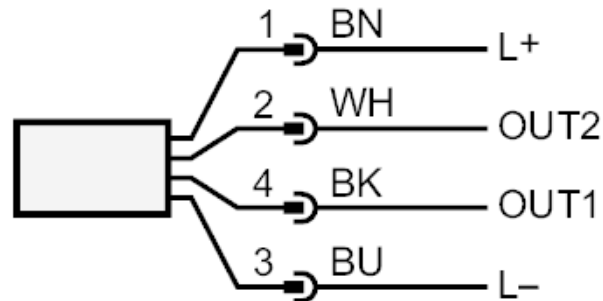

Colors to DIN EN 60947-5-2

OUT1:

- Switching output Volumetric flow quantity monitoring
- Pulse output quantity meter
- signal output Preset counter
- IO-Link

OUT2:

- Switching output Volumetric flow quantity monitoring
- Switching output Temperature monitoring
- analog output Volumetric flow quantity monitoring
- analog output Temperature monitoring
- Input counter reset

Core colors :

| | |
|------|-------|
| BK = | black |
| BN = | brown |
| BU = | blue |
| WH = | white |

SM4000


Magnetic-inductive flow meter

SMR14DXXFRKG/US-100



Diagrams and graphs

Pressure loss

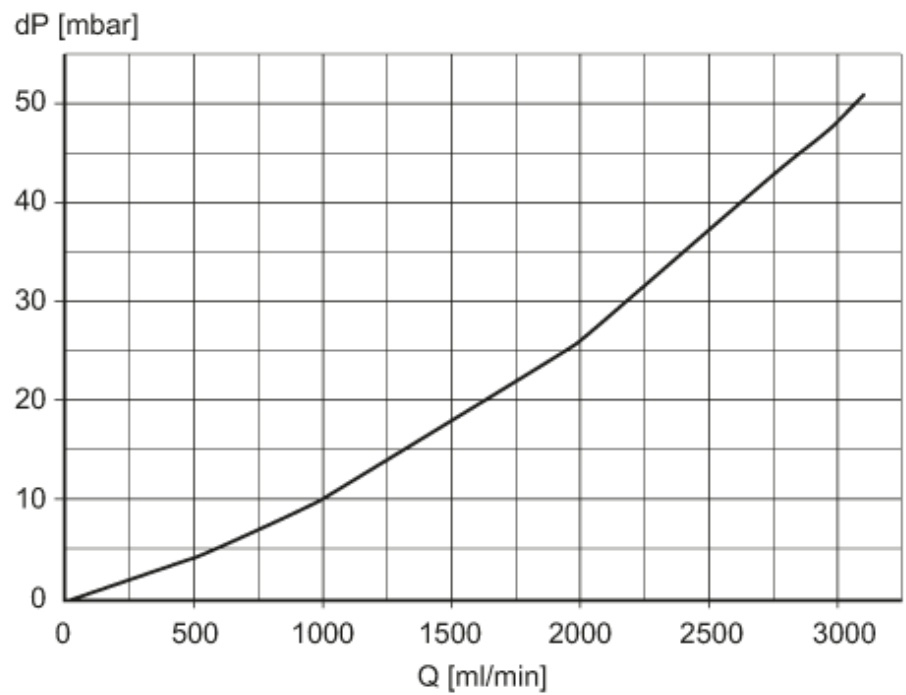

dP Pressure loss

Q volumetric flow quantity