


# IE5338



## Inductive sensor

IEBC003BASKG/AS

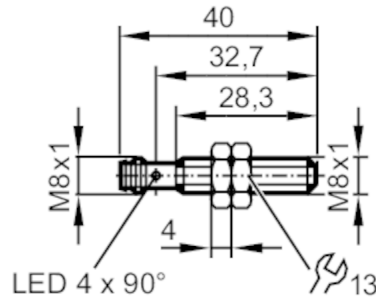

### Product characteristics

Electrical design		PNP/NPN
Output function		normally open
Sensing range	[mm]	3
Housing		Threaded type
Dimensions	[mm]	M8 x 1 / L = 40

### Electrical data

Operating voltage	[V]	10...30 DC
Protection class		III
Reverse polarity protection		yes

### Outputs

Electrical design		PNP/NPN
Output function		normally open
Max. voltage drop switching output DC	[V]	3.5
Minimum load current	[mA]	2; (only in 2-wire operation)
Max. leakage current	[mA]	0.5; (only in 2-wire operation)
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	800
Short-circuit protection		yes
Overload protection		yes

### Monitoring range

Sensing range	[mm]	3
Real sensing range Sr	[mm]	3 ± 10 %
Operating distance	[mm]	0...2.4

### Accuracy / deviations


Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminum: 0.4 / copper: 0.3
Hysteresis	[% of Sr]	1...20
Switch-point drift	[mm]	-10...10

# IE5338



## Inductive sensor

IEBC003BASKG/AS



Operating conditions		
Ambient temperature	[°C]	0...60
Protection		IP 65; IP 67; (with ifm socket duly screwed on)
Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	10 V
	EN 55011	class B
MTTF	[years]	1858
Embedded software included		yes
UL approval	Ta	0...60 °C
	Enclosure type	Type 1
	voltage supply	Limited Voltage/Current
	UL approval number	A017
	File number UL	E174191
Mechanical data		
Weight	[g]	16.5
Housing		Threaded type
Mounting		flush mountable
Dimensions	[mm]	M8 x 1 / L = 40
Thread designation		M8 x 1
Material		brass white bronze coated; sensing face: LCP orange; LED window: PPSU; lock nuts: brass white bronze coated
Tightening torque	[Nm]	A = 5 mm: 1,5 Nm; B = 2 Nm
Displays / operating elements		
Display	Switching status	4 LED, yellow
Accessories		
Items supplied		lock nuts: 2
Remarks		
Pack quantity		1 pcs.
Electrical connection - plug		
Connector: 1 x M8; coding: A		
		

# IE5338



## Inductive sensor

IEBC003BASKG/AS

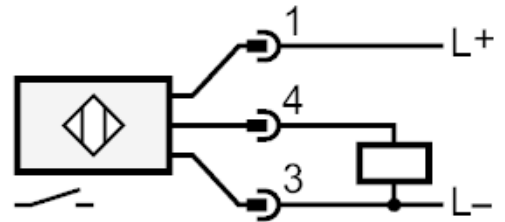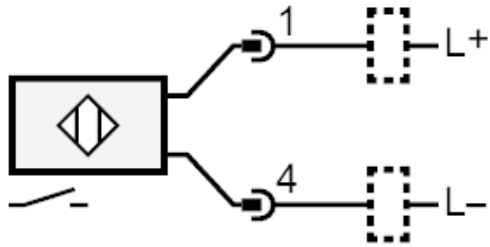

### Diagrams and graphs

#### Installation

